


Product Specification Sheet

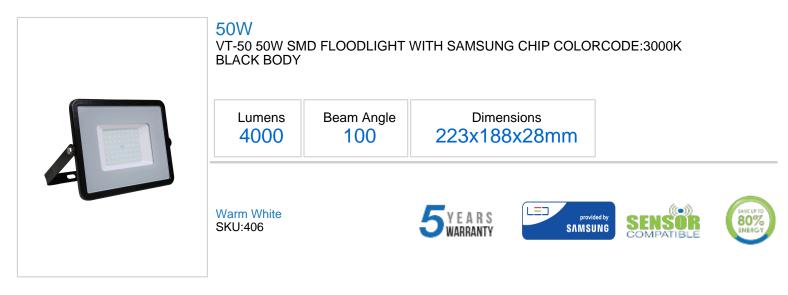

Technical Information

| Start: | 0-100% in It1s | IP Rating: | IP65 |
|-------------------|--------------------|------------------------|------------------|
| : | 50 | Dimmable: | No |
| nens: | 4000 | Warranty (Years): | 5 |
| am Angle: | 100 | PF: | >0.9 |
| it Color: | Black | CRI: | >80 |
| Туре: | Die Cast Aluminium | Operation Temperature: | -25 to +45°c |
| life: | 30,000 Hours | Input Power: | AC:220-240V/50Hz |
| O Chip Type: | SMD-Samsung Chip | Sensor Compatibility: | Yes |
| ED Chip Solution: | 9V 100mA+3V 150mA | | |

Features

- Perfect replacement of Metal Hallide Floodlight, High Pressure Sodium Floodlight & Halogen Floodlight
 - Fascia glass sealed with SILICONE RUBBER ensuring superior waterproof /airtight performance
 - High Power LED Samsung Chip
 - Constant current Integrated IC driver
 - Premium Quality Die Casting Aluminium Body
 - **Corrosion Resistant**
 - Available in different color options of White , Day White & Warm White
 - Complies with LM-80
 - Excellent coverage for area and façade lighting
 - Application Building Façade, Sports Facilities, Industrial, Commercial Bill Boards & Hoardings, Parking Lots etc



Suitable & Recommended for maximum daily use of 10-12 hours, usage beyond this would void the warranty

Packaging

| Unit Details | | Listing Details | |
|---------------------------------|----------|-----------------|---------------|
| Gross Weight(GW) Kgs | 1.02125 | EAN Code | 3800157629218 |
| Unit CBM | 0.001575 | Commodity Code | 9405403990 |
| Master Box Packaging | | | |
| Master Box Qty (Pcs Per Carton) | 8 | | |
| Qty Per Pallet | 480 | | |
| | | | |

