


Product Specification Sheet

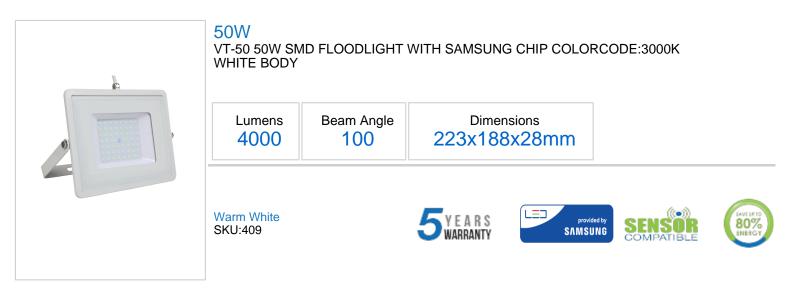

Technical Information

Start:	0-100% in It1s	IP Rating:	IP65
is:	50	Dimmable:	No
nens:	4000	Warranty (Years):	5
ım Angle:	100	PF:	>0.9
t Color:	White	CRI:	>80
/ Туре:	Die Cast Aluminium	Operation Temperature:	-25 to +45°c
ig life:	30,000 Hours	Input Power:	AC:220-240V/50Hz
D Chip Type:	SMD-Samsung Chip	Sensor Compatibility:	Yes
ED Chip Solution:	9V 100mA+3V 150mA		

Features

- Perfect replacement of Metal Hallide Floodlight, High Pressure Sodium Floodlight & Halogen Floodlight
 - Fascia glass sealed with SILICONE RUBBER ensuring superior waterproof /airtight performance
 - High Power LED Samsung Chip
 - Constant current Integrated IC driver
 - Premium Quality Die Casting Aluminium Body
 - **Corrosion Resistant**
 - Available in different color options of White , Day White & Warm White
 - Complies with LM-80
 - Excellent coverage for area and façade lighting
 - Application Building Façade, Sports Facilities, Industrial, Commercial Bill Boards & Hoardings, Parking Lots etc



Suitable & Recommended for maximum daily use of 10-12 hours, usage beyond this would void the warranty

Packaging

Unit Details		Listing Details	
Gross Weight(GW) Kgs	1.5	EAN Code	3800157629225
Length(Box)mm	30	Commodity Code	9405403990
Width(Box)mm	225		
Height(Box)mm	195		
Unit CBM	0.00195		
Master Box Packaging			
Master Box Qty (Pcs Per Carton)	8		
Qty Per Pallet	480		

